
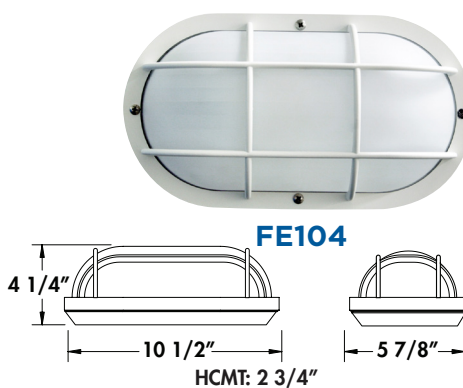


- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction

- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6

RESIDENTIAL EUROSTYLE

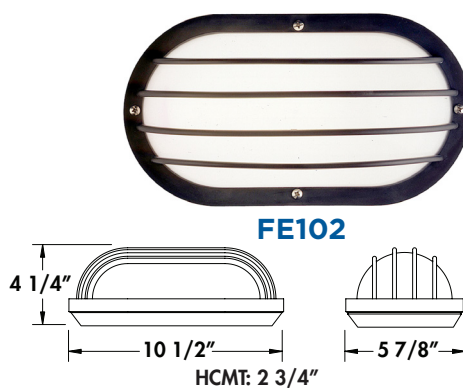

EXAMPLE # FE101-I60-BF-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FE101 FE102 FE103 FE104	INCANDESCENT, MEDIUM BASE, 120V I60-1 X 60W	W-White B-Black	POLYCARBONATE F-Frosted	LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G26-1 X 27W	W-White B-Black	POLYCARBONATE F-Frosted	L-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.


For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com

- Available in LED & GU24
- Fade & Rust Resistant Composite Construction with Powder Coated Aluminum Base
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6


COMMERCIAL EUROSTYLE



FE111



FE113

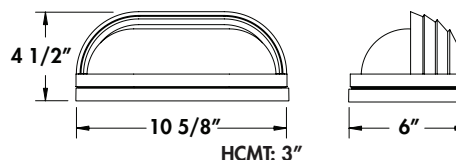

EXAMPLE # FE111-L900C-BF

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FE111 FE113	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR  LE800 - 13W, 80 CRI W -1140lm 3000K >88 Lumens Per Watt** C -1280lm 4000K	W -White B - Black	POLYCARBONATE F -Frosted	P -Photocell
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR  L900 - 11.3W Power Input C -912lm 4000K CRI 74 (TYP) >80 Lumens Per Watt**	W -White B - Black	POLYCARBONATE F -Frosted	N/A
	GU24 BASE, 120V G13 -1 X 13W G213 - 2 X 13W G18 -1 X 18W G26 -1 X 27W	W -White B - Black	POLYCARBONATE F -Frosted	P -Photocell L -CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE




Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

- Available in LED & GU24
- Fade & Rust Resistant Composite Construction with Powder Coated Aluminum Base
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6

COMMERCIAL EUROSTYLE

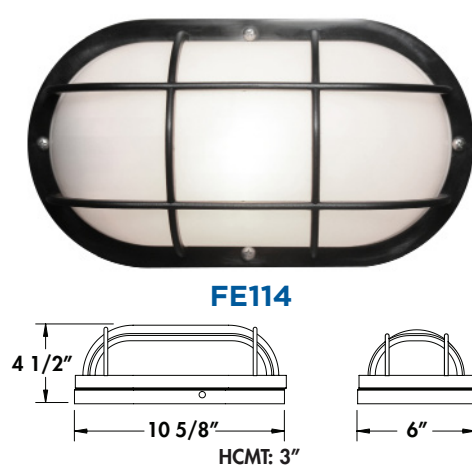

EXAMPLE # FE112-LE800W-BFP

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FE112 FE114	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR  LE800 - 13W, 80 CRI W -1140lm 3000K >88 Lumens Per Watt** C -1280lm 4000K	W -White B - Black	POLYCARBONATE F -Frosted	P -Photocell
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR  L900 - 11.3W Power Input C -912lm 4000K CRI 74 (TYP) >80 Lumens Per Watt**	W -White B - Black	POLYCARBONATE F -Frosted	N/A
	GU24 BASE, 120V G13 -1 X 13W G213 - 2 X 13W G18 -1 X 18W G26 -1 X 27W	W -White B - Black	POLYCARBONATE F -Frosted	P -Photocell L -CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com